



Ex UCB

Multi-purpose Ex Enclosure Junction Box



EOL, junction box, or interposing line unit
Resistant to most acids, alkalis & oils

IP66

**Fire
detection**



Signaline





Model	Signaline Ex UCB
Dimensions	99 x 99 x 65mm
Pack weight	0.1kg
IP rating	IP66
Operating temp.	-35°C to +120°C
Mounting	Wall
Material	Polycarbonate enclosure with non-ageing polyurethane seal
Colour	Black

The Signaline Ex Universal Connector Box (Signaline Ex UCB) is suitable for use with all variants of Signaline FT-68, FT-88, FT-105 and Signaline FT-EN Range.

A UCB can be used as an end of line unit, junction box or an interposing line unit (see right).

It is supplied with:

- 1x Ex enclosure (with lid)
- 2x brass glands
- 2x Ex nylon glands
- 1x Ex nylon stopping plug
- 1x terminal block (fitted)
- 1x terminal block holder (fitted)
- 1x 470 ohm resistor (colour code: yellow/violet/brown/gold)
- 1x 680 ohm resistor (colour code: blue/grey/brown/gold)

Included resistors allow Signaline FT cable to be connected directly to the zone terminals of most conventional fire control panels.


This product is not suitable for use with Signaline HD+, FT-185-R or FT-230-X.

Visit Signaline.com for our full range of heat detection solutions


Configurations

█ Signaline FT/HD
█ Lead in cable


End of line enclosure*

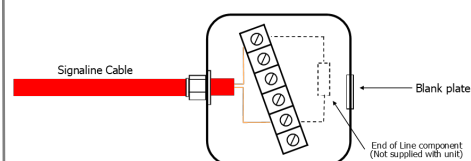

Junction box

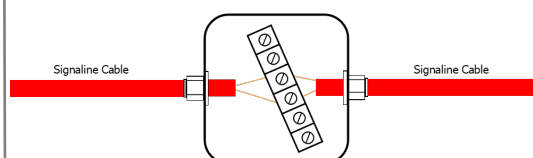

Interposing line unit (Signaline FT only)

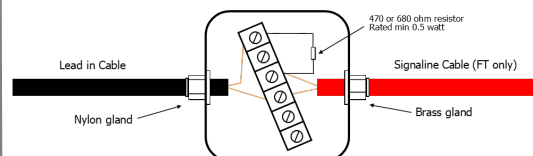


*The end of line monitoring component (such as resistor, capacitor or diode) is not included. This is normally supplied by the control panel manufacturer.




Enclosure Specs

Top View

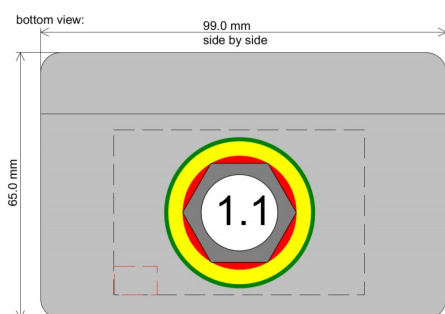

Bottom View

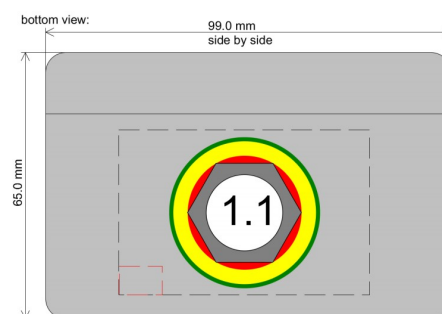

No drillings on left or right side of the enclosure

