



WATER TRAP


(WH-WT-01 - 25mm)

Used in an environment where there are constant temperature changes, which causes condensation in the system, typically in a chill store or a room that is open to the atmosphere, the water collects in the bottom of the clear plastic tube, which can be drained at will. For potential larger water volumes the condensation trap should be used.

Installation Instructions:

- Use the correct solvent Plusbond 3019.
- Do not paint.
- Keep pipe clean and free from dust.
- Do not install in direct sunlight.
- Only install with approved pipe.
- Do not use solvents to clean, only soapy water.

Part No.	WH-WT-01 - 25mm
Fitting Colour	WHITE
Pipe Colour	OPAQUE
Diameter Tolerance	+/- 0.15mm

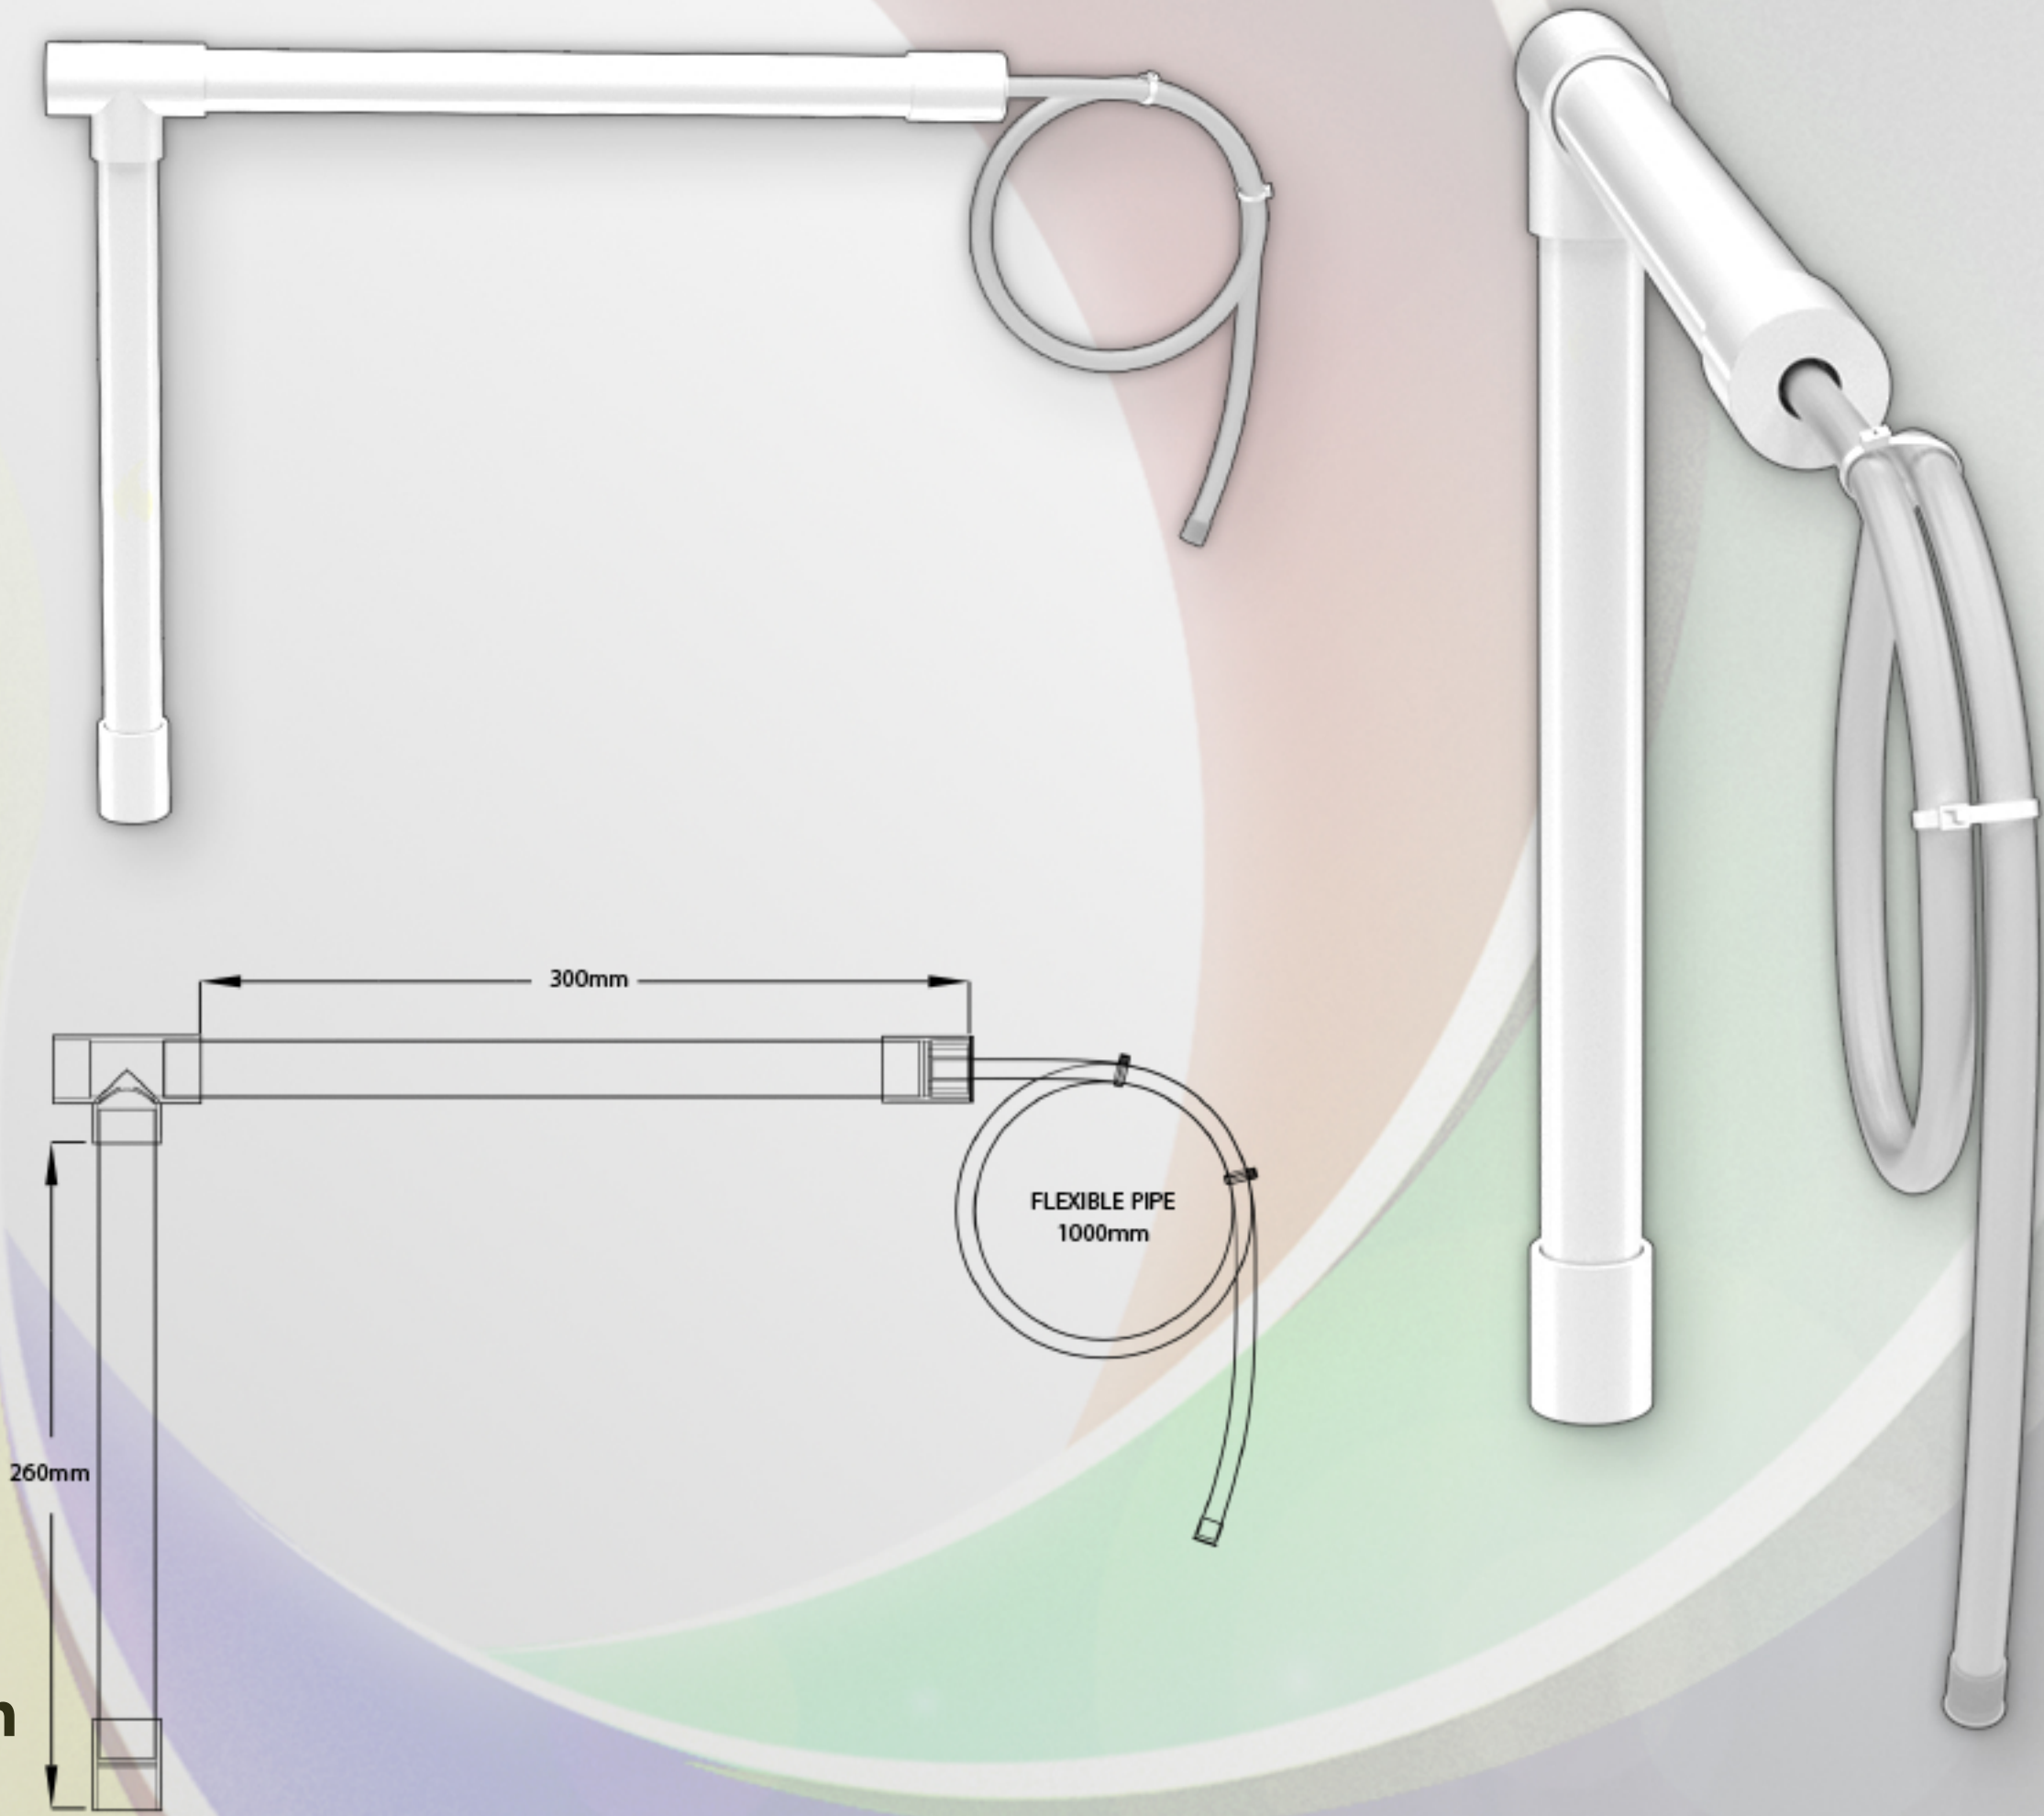

RAW MATERIAL DATA
Kumho ABS 750 Acrylonitrile Butadiene Styrene
Physical: Specific Gravity 1.04 Test Method ASTM D792
Melt Mass - Flow Rate (MFR) 200°C/21.6 kg 47 g/10 min 200°C/5.0 kg 4.1 g/10 min 220°C/10.0 kg 34 g/10 min Test Method ASTM D1238
Molding Shrinkage - Flow 0.0040 to 0.0070 in/in Test Method ASTM D955
Mechanical: Tensile Strength Yield, 73°F (23°C) 1.97 in (50.0mm) 6670 psi Test Method ASTM D638
Tensile Elongation Yield, 73°F (23°C) 1.97 in (50.0 mm), 15% Test Method ASTM D638
Flexural Modulus Yield, 73°F (23°C) 0.118 in (3.00 mm) 312000 psi Test Method ASTM D638
Flexural Strength Yield, 73°F (23°C) 0.118 in (3.00 mm) 9230 psi Test Method ASTM D790
Impact Notched Izod Impact 73°F(23°C), 0.126 in (3.20 mm), 5.5 ft-lb/in 73°F(23°C), 0.252 in (6.40 mm), 4.8 ft-lb/in Test Method ASTM D256
Hardness Rockwell Hardness (R-Scale) 108 Test Method ASTM D785
Thermal Deflection Temperature Under Load 264 psi (1.8 MPa), Unannealed 185°F/85°C Test Method ASTM D648 Vicat Softening Temperature 203°F/95°C Test Method ASTM D1525
Flamibility Flame Rating 0.0630 in (1.60 mm) HB 0.0866 in (2.20 mm) HB 0.126 in (3.20 mm) HB Test Method UL 94
Typical properties, not to be used as specification. * Average mechanical property values of several measurements carried out on standard injection-moulded test specimens prepared in accordance with ISO 1873-2.

Nylon
NFM 10x7.5 - OD Tol's +0.03/-0.09mm Burst Pressure 995 PSI / 68 bar Bend Radius 40mm Weight/30m 1.08kgs
NEM 10x8 - OD Tol's +0.02/-0.10mm Burst Pressure 772 PSI / 53 bar Bend Radius 50mm Weight/30m 0.87kgs
Temperature Range - -40°C to +70°C, Occasional use up to +130°C, Brittle point: -70°C
Technical information for use as a guide only. Pressure values given are based on the short term burst pressure at 20°C based on a 3:1 safety factor. Any increase in temperature above 20°C will result in a decline in working pressure values. Products and specifications are subject to improvements and change without notice.
Polypropylene Tatren IM 55 80
MFR (230°C/2.16kg) Test Method: ISO 1133-1 Unit: g/10 min Typical Value: 55
Tensile Stress at Yield* Test Method: ISO 527-1,2 Unit: MPa Typical Value: 23
Tensile Strain at Yield* Test Method: ISO 527-1,2 Unit: % Typical Value: 4
Modulus of Elasticity in Tension* Test Method: ISO 527-1,2 Unit: MPa Typical Value: 1500
Flexural Modulus* Test Method: ISO 178 Unit: MPa Typical Value: 1450
Izod Impact Strength Notched, 23°C* Test Method: ISO 180/A Unit: kJ/m² Typical Value: 7
Izod Impact Strength Notched, -20°C* Test Method: ISO 180/A Unit: kJ/m² Typical Value: 4
HDT 0.45 MPa* Test Method: ISO 75-1,2 Unit: °C Typical Value: 105
Rockwell Hardness* Test Method: ISO 2039/2 Unit: R Scale Typical Value: 82

Bisson Ltd Unit 11, Eldonwall Trading Estate, St.Phillips, Bristol, BS4 3QQ
Tel: 0117-967-9999 Fax: 0117-961-9261 http://www.abspipesandfittings.co.uk