

DATASHEET

TI-HS7

Tekin IP66 100V Horn Speaker 15W (Outdoor)

Features

- 🔥 P.A Quality 15W Fire Alarm Outdoor Horn Speaker
- 🔥 IP66 (Water/Dust) for Outdoor Use
- 🔥 Built-in Blocking Capacitor for Line Monitoring
- 🔥 ABS Construction with Steel Mounting Bracket
- 🔥 6 x Selectable Wattage Power Tappings
- 🔥 Weighs only 1.2kg
- 🔥 Compact 180 x 130 x 190mm Dimensions
- 🔥 SPL 103dB +/- 3dB (1W@1M)
- 🔥 **10 Year Manufacturer's Warranty**

Overview

The Tekin HS7 fire alarm horn speaker produces P.A quality sound with a wide frequency response, making it suitable for use in a wide range of audio applications.

The built-in blocking capacitor enabling line monitoring makes it suitable for the NZ fire alarm industry.

Made from ABS white with an IP66 rating, this outdoor speaker is designed to withstand the harsh NZ weather conditions.

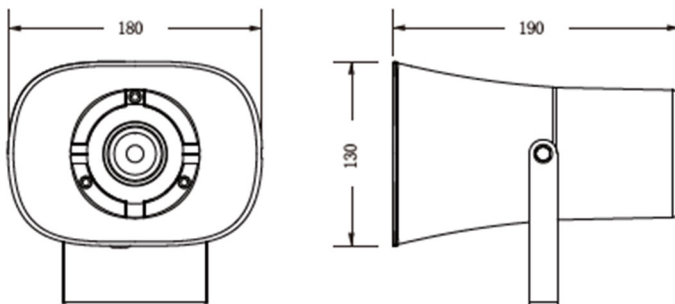


Figure 2: TI-HS7 Dimensions



Figure 1: TI-HS7 Rear Cable Colour & Wattage Tapping Settings



+64 800 483 547
+64 800 4 TEKIN




info@tekin.nz
www.tekin.nz




20 Mahoe St, Taupo 3378
Waikato, New Zealand

Technical Specification

Model	TI-HS7
Sound Pressure Level (SPL)	105 +/- 3dB (1W @ 1m)
Frequency Response	500Hz-7.5KHz
Voltage	100 Vrms
Power Tapping (Watts)	1.25/2.5/5/7.5/10/15
Line Monitoring	Built-in blocking Capacitor
Operating Temperature	-25° C to +55° C
IP Rating	IP66
Materials	ABS White (RAL9016)
Weight	1.2kg
Dimension (W x H x L)	180mm x 130mm x 190mm
Mounting	Wall or Ceiling Mount

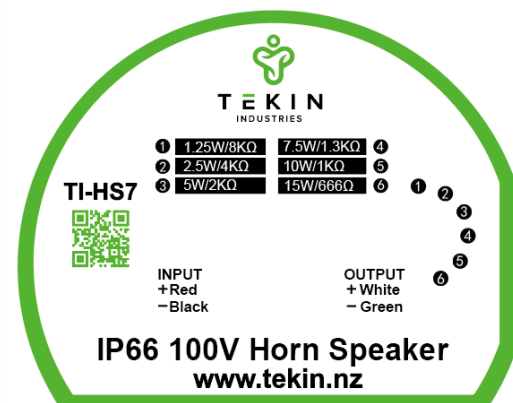

Speaker Frequency Response

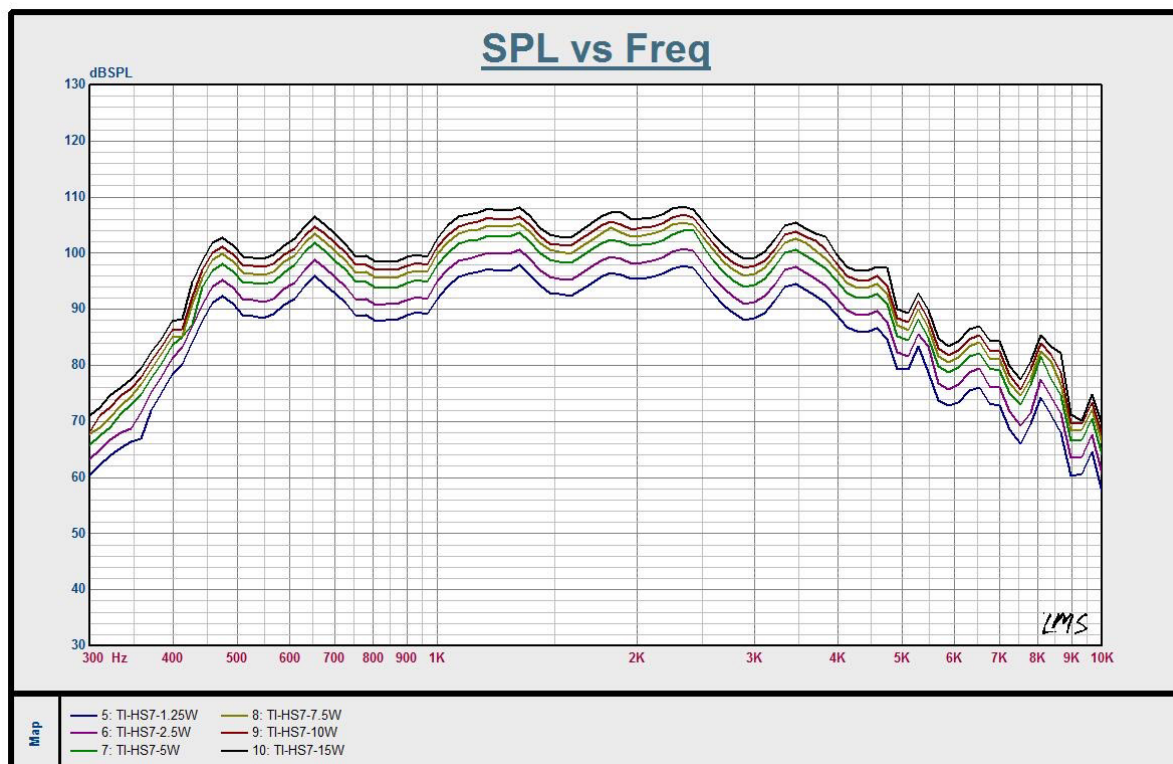

Product Ordering Code

Product Code	Product Description
TI-HS7	IP66 100V Horn Speaker 15W (Outdoor)



+64 800 483 547
+64 800 4 TEKIN



info@tekin.nz
www.tekin.nz



20 Mahoe St, Taupo 3378
Waikato, New Zealand